

PERIBOARD-513 III




PRODUCT FEATURES

- Built-in touchpad with control of mouse function
- Fit with various industrial and professional use

PRODUCT SPECIFICATION

Dimension	435x135x29 mm	Certifications	CE, FCC
Weight	624±10 g	System requirement	Windows 7 or later
Tracking method	Touchpad	Operating temperature	-5 to 45°C
Number of keys	105/US, 106/EU	Storage temperature	-20 to 60°C
Cable length	1800 mm	Electrical rating	70mA
Connection type	Wired USB	Operating voltage	5 VDC
Colour	Black	Key press life cycle	3 Mio.
Material	ABS	Layouts	DE, UK, US
Key switch technology	Scissor-switch		

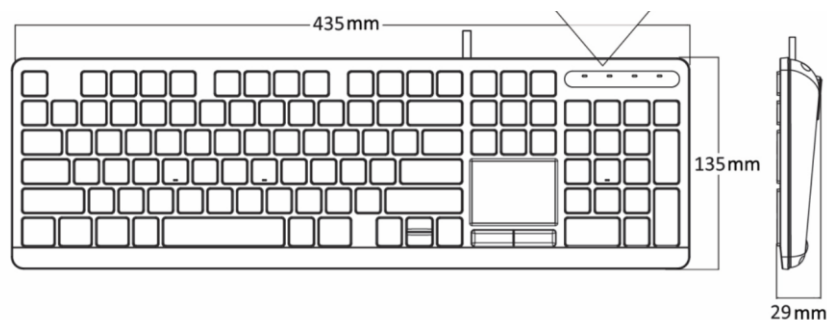

The diagram illustrates a standard QWERTY keyboard layout. The keys are arranged in four main rows. The top row includes the Esc key, 12 function keys (F1-F12), a Print key, a Scroll Lock key, and four window management keys. The second row contains the Tab key, letters Q through semicolon/underscore, and apostrophe/quotation mark/underscore/tilde, a right arrow key, a Pause/Break key, and a numeric keypad with Num Lock, forward slash/underscore, asterisk/plus, and minus/underscore. The third row features a left arrow key, letters Q through spacebar, a right arrow key, a Tab key, an Enter key, and a numeric keypad with 7 through 0, plus, and minus. The bottom row includes a left arrow key, letters A through spacebar, a right arrow key, a Tab key, an Enter key, and a numeric keypad with 1 through 0, plus, and minus. The keyboard is shown from a top-down perspective, with a light gray background and black keys.

The diagram illustrates a standard QWERTY keyboard layout. The keys are arranged in four rows:

- Row 1:** Esc, F1, F2, F3, F4, F5, F6, F7, F8, F9, F10, F11, F12, Print Screen, Scroll Lock, Pause/Break, and four indicator lights.
- Row 2:** Tilde/underscore, numbers 1-0 with symbols, hyphen/underscore, equals/asterisk, left arrow, Insert, Home, Page Up, Num Lock, forward slash/backslash, asterisk/underscore, and hyphen/underscore.
- Row 3:** Tab/Shift, letters Q-P with symbols, left and right square brackets, apostrophe/quotation mark, backslash/apostrophe, Delete, End, Page Down, 7/Home, 8/up arrow, 9/page up, and a plus/equals key.
- Row 4:** Caps Lock, letters A-L with symbols, semicolon/apostrophe, double quote/apostrophe, Enter, a large empty rectangular area, 4/underscore/underscore, 5/underscore, 6/underscore/plus, 1/End, 2/down arrow, 3/page down, and an Enter key.
- Row 5:** Ctrl, Fn, Shift, Alt, a large empty rectangular area, Alt, Ctrl, left arrow, arrow keys (up, down, left, right), right arrow, and a split function key.



<https://eu.perixx.com/>
Perixx Computer GmbH +49-211-569488-00
Heerdter Landstraße 189e, 40549 Düsseldorf, Germany

株式会社 Perixx Japan +81-50-5809-9650
〒103-0004 東京都中央区東日本橋二丁目28番4号
日本橋 CETビル2 階

佩銳科技有限公司 (進口商) +886-2-2748-5232
10052 台北市中正區徐州路18巷32號1樓

制 造 商：佩 銳 科 技 （ 深 圳 ） 有 限 公 司
Manufacturer : Perixx Technology (ShenZhen) Co., Ltd.
地 址：深 圳 市 南 山 区 西 麗 街 道 新 光 路 43 号
聚 創 金 谷 創 意 園 A 棟 # 509-510
A d d r e s s : #A509-510 Ju Chuang Jin Gu Building, Xinguang
Road 43, Xili Street, Nanshan District, Shenzhen
City, China
Customer Service Email : shop@perixx.com