

PERIDUO-212



PRODUCT FEATURES

- Compact Size
- Plug and play, easy installation


KEYBOARD SPECIFICATION

Dimension	291x138x22 mm	Certifications	CE, FCC
Weight	300±10g	System requirement	Windows 7 or later
Number of keys	79/US, 80/ EU, 83/ JP	Operating temperature	-5 to 40°C
Connection type	Wired USB	Storage temperature	-15 to 60°C
Cable length	1800 mm	Eelectrical rating	30mA max. (Operating)
Indicator	Yes(Caps Lock)	Operating voltage	4.25~5.25 VDC
Advanced function key	12	Key press life cycle	10 Mio
Hot keys	-	Key switch technology	Membrane
Material	ABS	Layouts	DE, US, UK, ES, IT, JP , FR
		Colour	Black, White


MOUSE SPECIFICATION

Dimension	104x62x34 mm	Certifications	CE, FCC
Weight	77±10g	System requirement	Windows 7 or later
Number of buttons	3	Operating temperature	-5 to 40°C
Connection type	Wired USB	Storage temperature	-15 to 60°C
Cable length	1800 mm	Eelectrical rating	15mA max. (Operating)
Sensor	Optical	Operating voltage	4.25~5.25 VDC
DPI	1000	Material	ABS
		Colour	Black


DE Layout

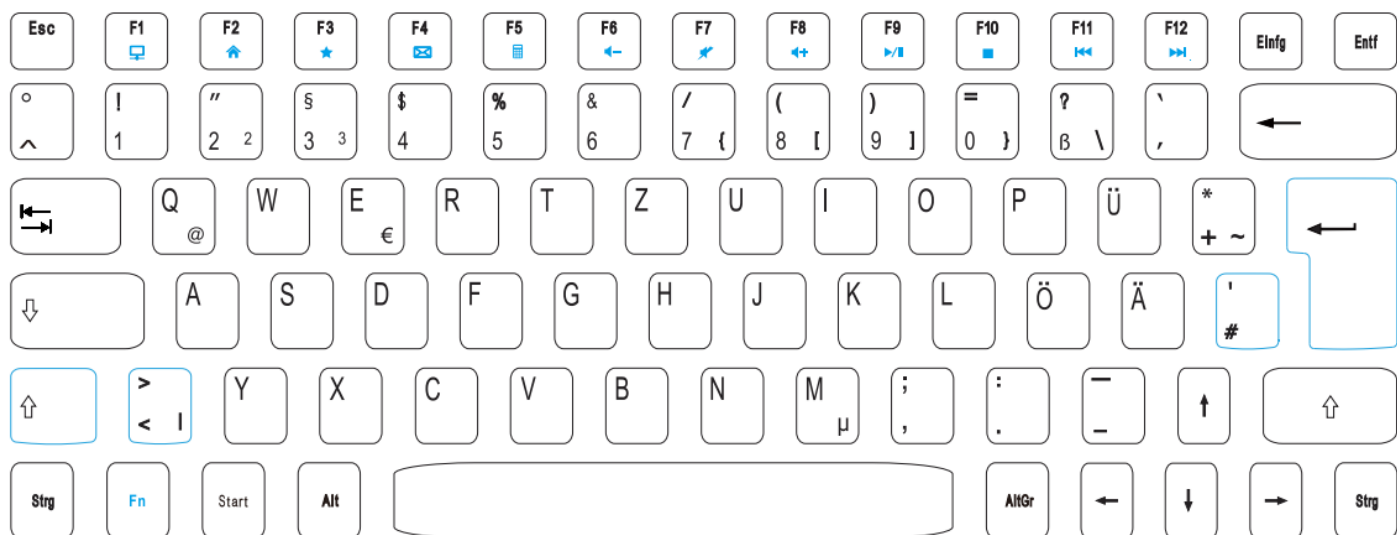


US Layout

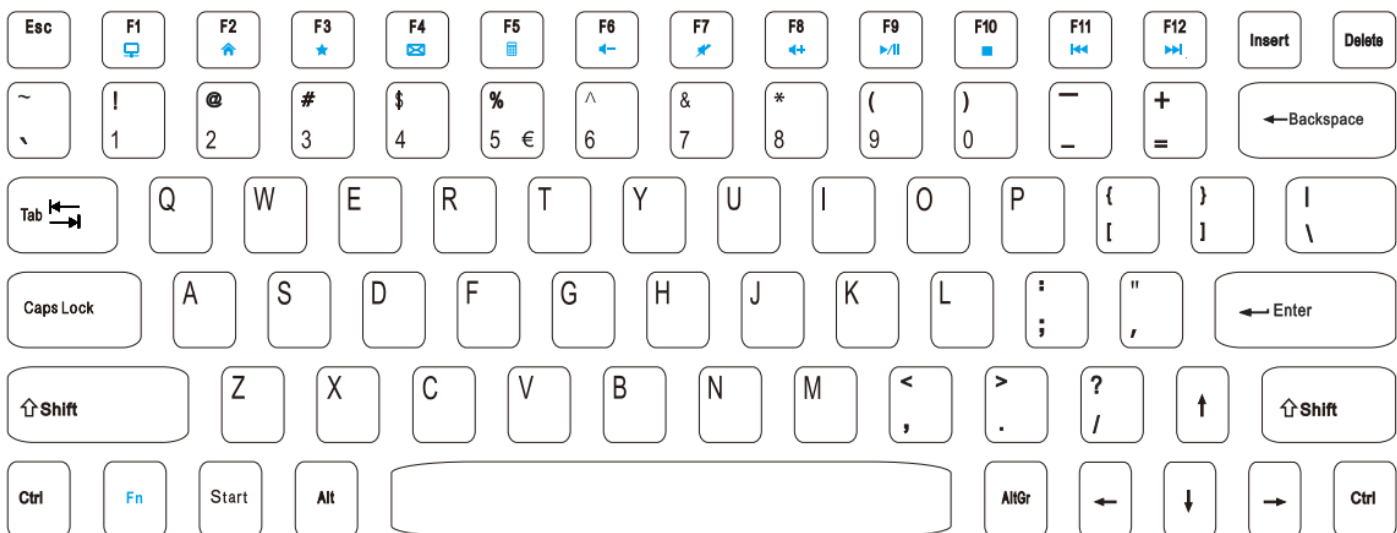


UK Layout

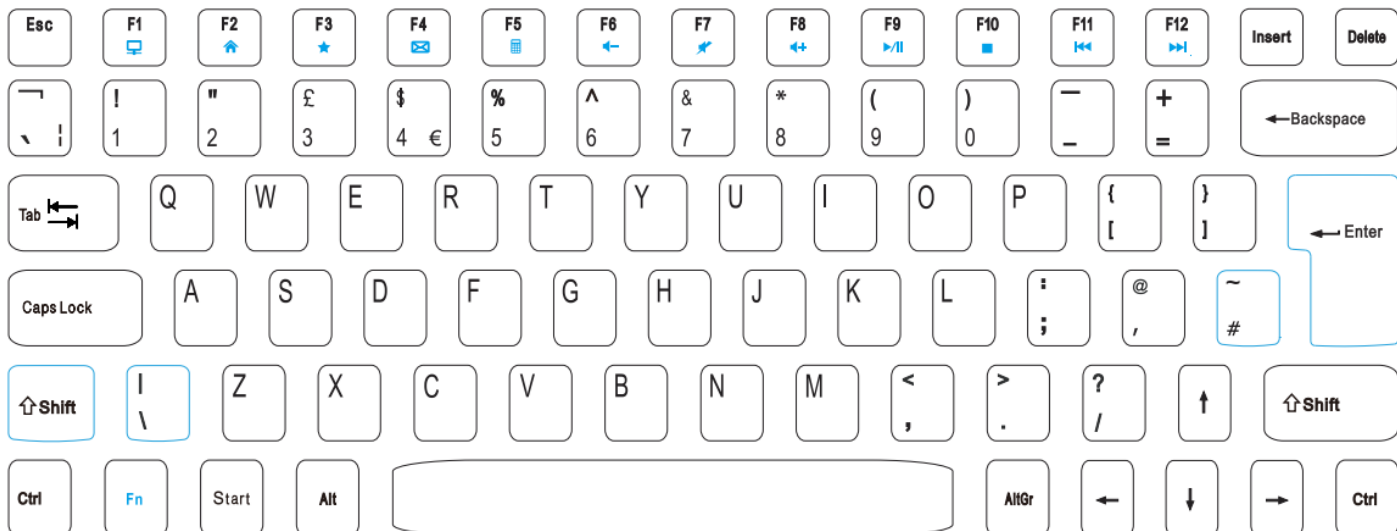


ES Layout

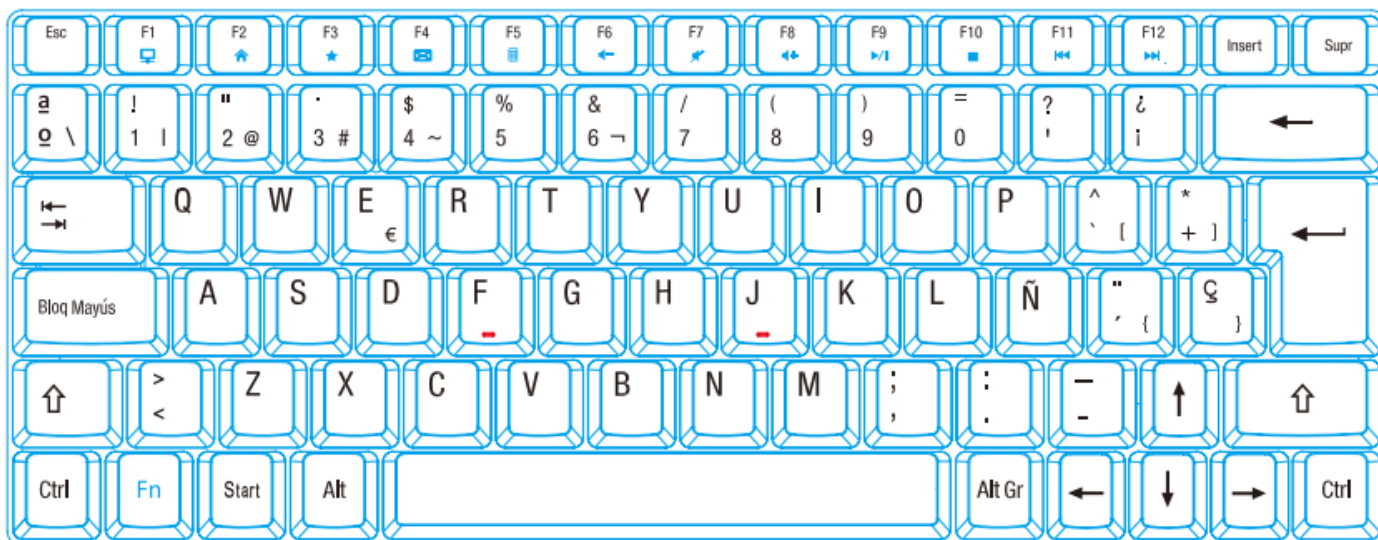

IT Layout

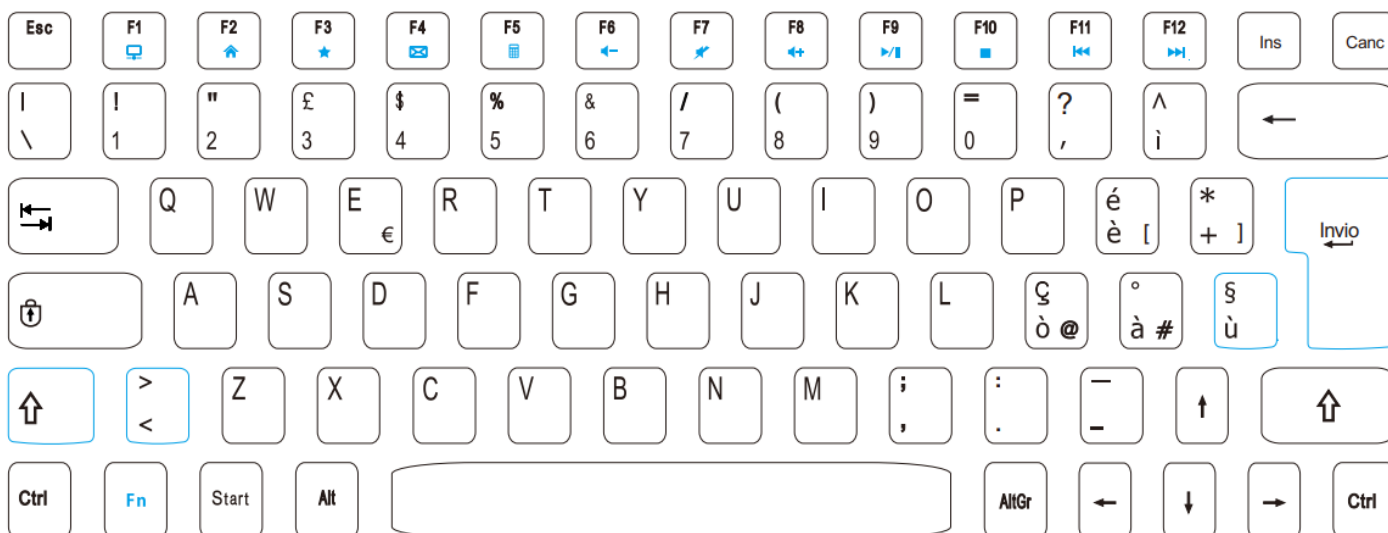

JP Layout

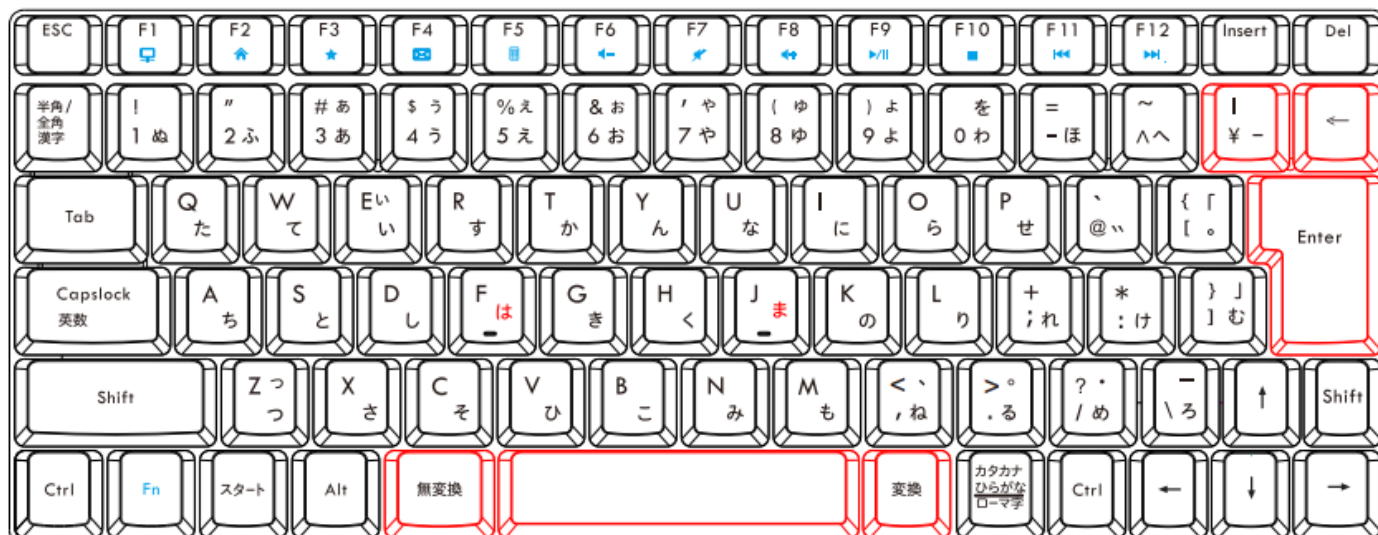

FR Layout



No driver needed



<https://eu.perixx.com/>
Perixx Computer GmbH +49-211-569488-00
 Heerdter Landstraße 189e, 40549 Düsseldorf, Germany

株式会社 Perixx Japan +81-50-5809-9650
 〒103-0004 東京都中央区東日本橋二丁目28番4号
 日本橋 CETビル2 階

佩銳科技有限公司 (進口商) +886-2-2748-5232
 10052 台北市中正區徐州路18巷32號1樓

制 造 商: 佩 銳 科 技 (深 圳) 有 限 公 司
 Manufacturer: Perixx Technology (ShenZhen) Co., Ltd.
 地 址: 深 圳 市 南 山 区 西 麗 街 道 新 光 路 43 号
 聚 創 金 谷 創 意 園 A 栋 # 509-510
 Address: #A509-510 Ju Chuang Jin Gu Building, Xinguang
 Road 43, Xili Street, Nanshan District, Shenzhen
 City, China
 Customer Service Email: shop@perixx.com