

PERIDUO-712



PRODUCT FEATURES

- Low Voltage indicator
 - 128-bit encryption
- Plug and play, easy installation


KEYBOARD SPECIFICATION

Dimension	291x138x22 mm	Certifications	CE, FCC
Weight	301g	System requirement	Windows 7 or later
Number of keys	79/US, 80/EU, 83/JP	Operating temperature	-5 to 40°C
Connection type	Wireless 2.4 GHz	Storage temperature	-15 to 60°C
Power supply	1 x AA	Eelectrical rating	6mA max. (Operating)
Batteries included	No	Operating voltage	1.5 VDC
Indicators	Yes	Key press life cycle	5 million times
Hot keys	13	Key switch technology	Membrane
Material	ABS	Layouts*	DE, US, UK, FR, IT, ES, JP
		Colour	Black/White


MOUSE SPECIFICATION

Dimension	104x63x34 mm	Certifications	CE, FCC
Weight	52g	System requirement	Windows 7 or later
Number of buttons	3	Operating temperature	-5 to 40°C
Connection type	Wireless 2.4 GHz	Storage temperature	-15 to 60°C
Power supply	1 x AA	Eelectrical rating	10mA max. (Operating)
Batteries included	No	Operating voltage	1.5 VDC
Sensor	Optical	Material	ABS
DPI	1200	Colour	Black/White


DE Layout

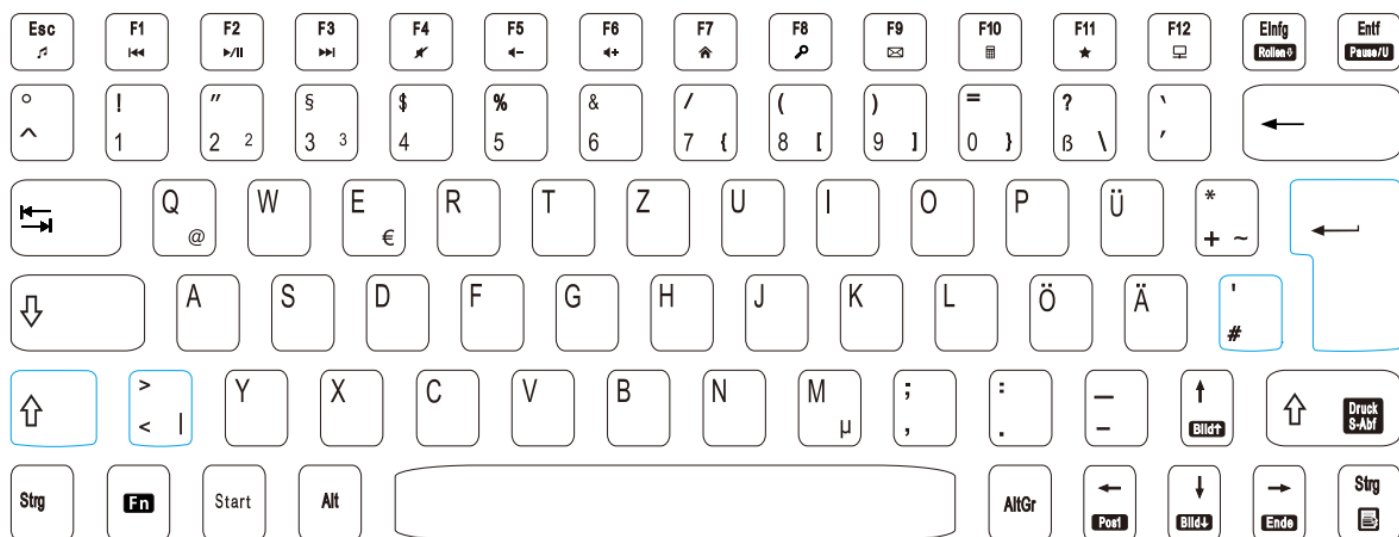

US Layout

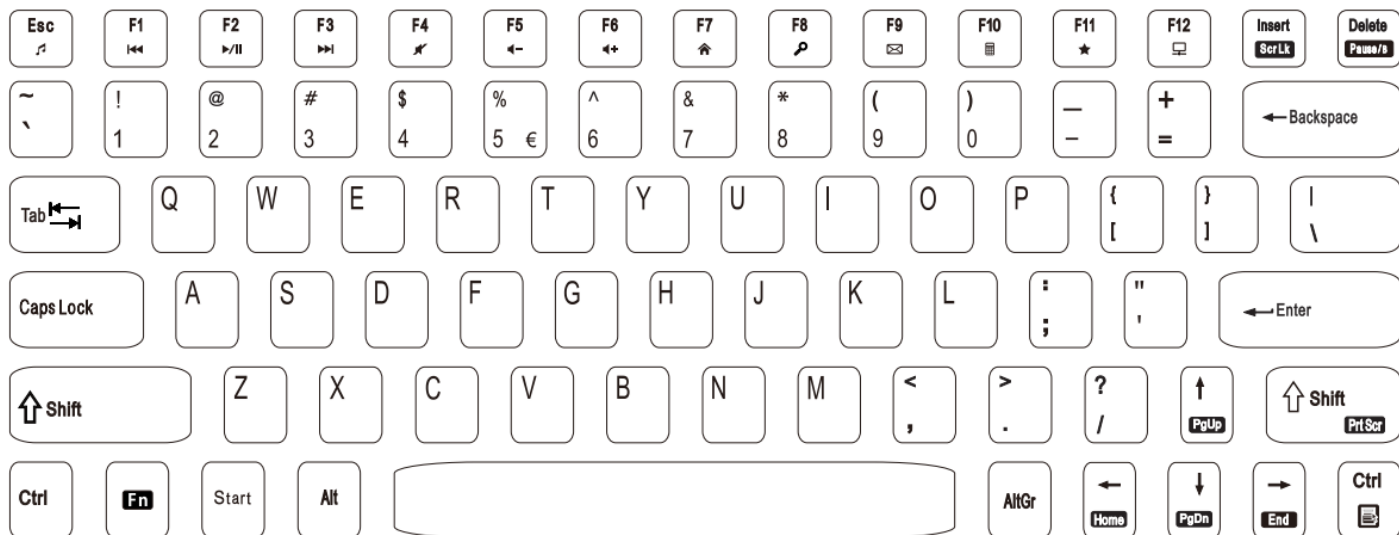


UK Layout

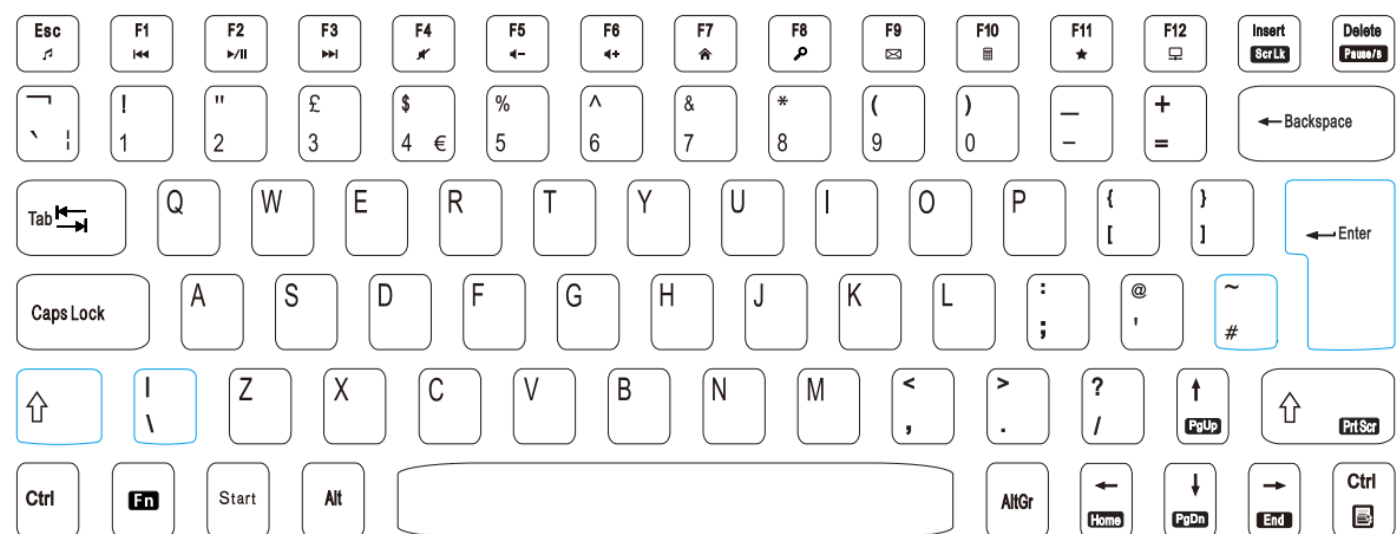


FR Layout




IT Layout

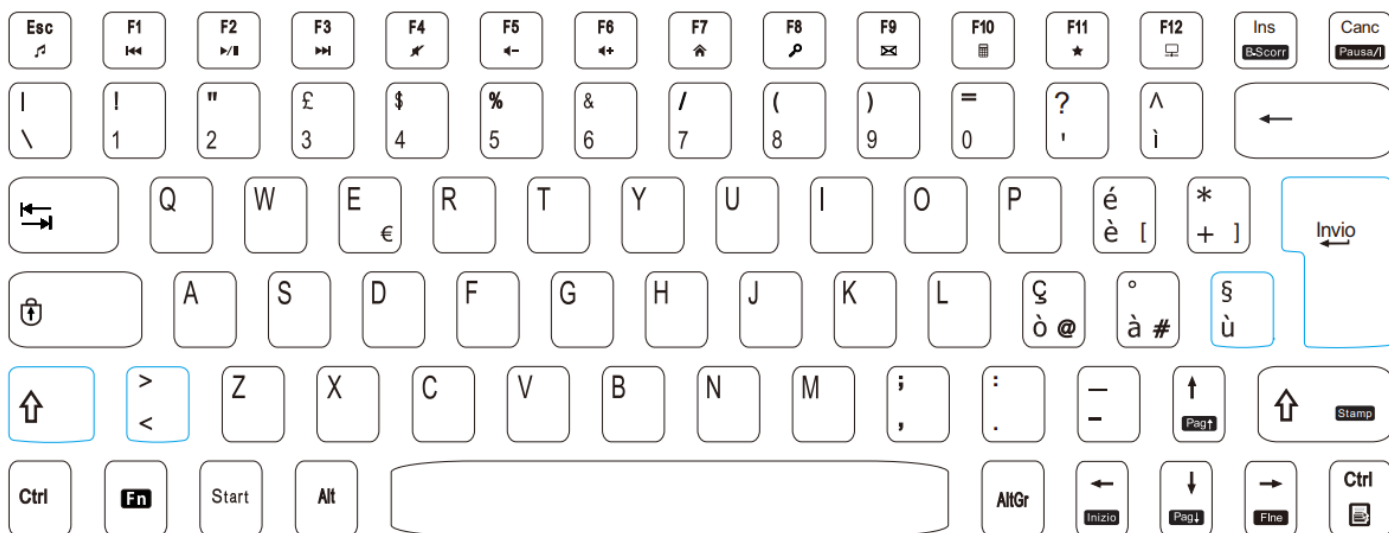

ES Layout

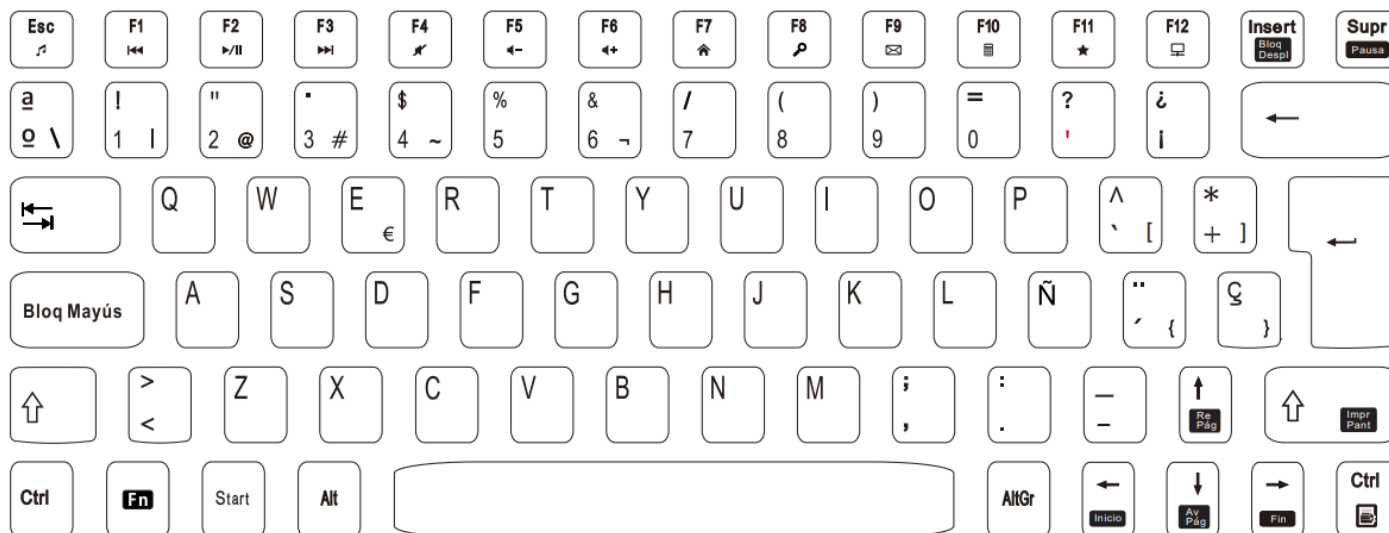

JP Layout

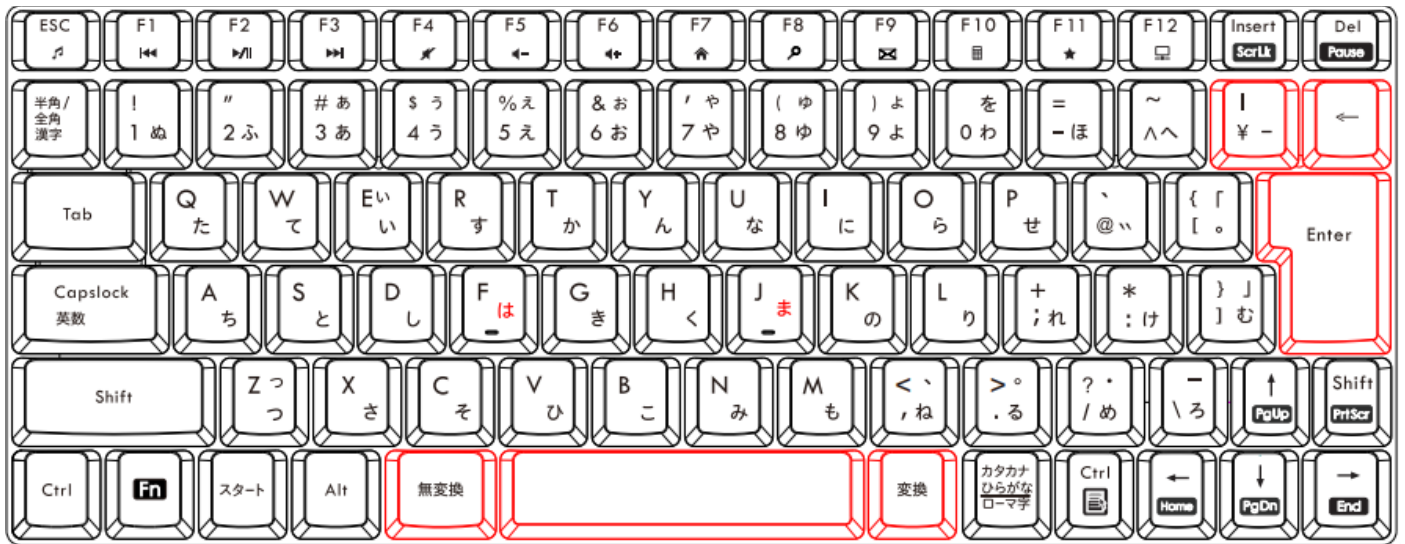

No driver needed



Perixx Computer GmbH +49-211-569488-00
Heerdter Landstraße 189e, 40549 Düsseldorf, Germany
<https://eu.perixx.com/>

株式会社 Perixx Japan +81-50-5809-9650
〒103-0004 東京都中央区東日本橋二丁目28番4号
日本橋 CETビル2 階

佩銳科技有限公司 (進口商) +886-2-2748-5232
10052 台北市中正區徐州路18巷32號1樓

制 造 商: 佩銳科技 (深圳) 有 限 公 司
Manufacturer: Perixx Technology (Shenzhen) Co., Ltd.
地 址: 深圳市南山区西麗街道新光路43号
聚創金谷创意園A栋#509-510
A d d r e s s : #A509-510 Ju Chuang Jin Gu Building,
Xinguang Road 43, Xili Street, Nanshan
District, Shenzhen City, China
Customer Service Email: shop@perixx.com